

AK-1708K5 / AK-1708K5-IP



- 17" LCD Monitor with LED Backlight
- 8 Port CAT.5 KVM
- Installation Depth 559mm only



AK-1708K5 is a 17" Monitor-Key-Drawer with LED backlight. A value keyboard with number block and touchpad and the integrated 8 Port CAT.5 KVM-switch are completing the external design. The casing conforms the 1U Standard, is easily installed and mountable with the included mounting kit.

The device can optional be equipped with an IP-module.



Properties

- 1U 17" LCD console, 571mm total depth
- Stepless, adjustable angle from 0 to 105° with high quality torque hinges
- Easy one-man-assembly with the included installation angles
- Integrated 8-port CAT.5 KVM-switch
- Adjustable depth: 560mm to 900mm (Standard)
- Chromed metal handle
- Practical knurled screws
- High graphic resolution, up to 1280 x 1024 with 60Hz

Keyboard versions


Available in following versions: German (DE), US-English (US), UK-English (UK), French (FR), Spanish (SP), Italian (IT). Swiss / German (CH) and swedish / finnish (SWE/FI)

Versions available on request: Turkish (TK), Russian(RU)



Specifications

- The corresponding dongle **are included with delivery.**
- Cascadable up to a port capacity of 128 ports by tree-chaining
- Computer selection by push buttons, Keyboard -Hotkeys and OSD-Menu
- On-Screen-Display und system notification as a Pop-Up
- Automatic Power ON/OFF pushing the console back to the rack
- Supports all USB suitable operating systems: for example DOS, Windows Series / Server 2008 / Server 2013, Linux, MacOS, etc.
- Numeric LED status indicators for clear display of port status

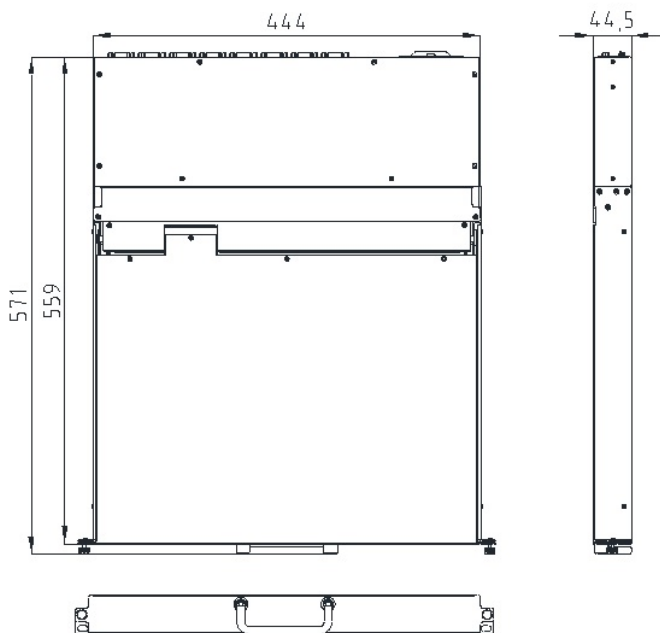

Technical data:

Connections KVM	Graphic / Keyboard / Mouse	8 x RJ-45
	Console(remote)	1 x RJ-45 (only with IP version)
	Console (local)	2 x USB-A
	Power supply	1 x DC-12V
Connections (Standard)	1x VGA und 1x USB Standard	8 x KD-DON-USB Standard
	1x VGA und 2x PS/2 Optional	KD-DON-PS/2 Optional
Switch	LCD settings	5 Pressure switch
	ON / OFF	1 Pressure switch
	OFF (LCD folded)	1 Semi-covert pressure switch
LED-Display panel	Operation	1 x green/red
	Number	1 x blue
	Capital letters	1 x blue
	Scroll	1 x blue
LED-Display KVM	Port/Switch	8 x green (Port)
Emulation	Keyboard/ Mouse	USB & PS/2
	Display	JA
Port selection	Hotkey / OSD	
Graphic	17" LCD	1280 x 1024
	Colors	16,2 Mio.
	Frame Rate	H: 31,0 KHz. – 81,0 KHz. V: 56,0 KHz. – 76,0 KHz.
	Viewing angle	H: 140° / V: 130°
	Bandwith	140 Mhz.
	Brightness	300 cd/m²
	Contrast	700 : 1
	Reaktion time	4 ms.
	Pixel pitch	0,264mm (H) x 0,264mm (V)
	Backlight	LED
Input values	100 V. – 240 V. AC, 48 Hz – 62 Hz	
Output values	DC 12V., 4,16A	
Power consumption	230 V / 14,6 Watt	
Certification	RoHS, RoHS2, CE	
Environment	Operating temperature	-10 - 50°C
	Storage temperature	-20 – 60°C
	Humidity	0 – 80% relative humidity (non condensing)
Physical properties	Casing	High performance steel
	Color	RAL 9005
	Weight	16.8 kg incl. angles
	Dimension (L x W x H) w/o handle	555 x 450 x 44,5mm (19" / 1U)
	Dimension (L x W x H) w. handle	567 x 450 x 44,5mm (19" / 1U)
Packaging	Weight	17.8 kg
	Dimension (L x W x H)	74 x 62 x 18 cm