

AK-1716 / AK-1716IP



- 17" LCD Monitor with LED Backlight
- 16 port KVM-switch USB / PS/2
- Depth 559mm only



AK-1716 is a 17" Monitor-KeyBoard-Drawer with LED backlight. A value keyboard with number block and touchpad and the integrated 16 Port Combo VGA KVM-switch are completing the external design. The casing conforms the 1U Standard, is easily installed and mountable with the included mounting kit.

The device can optional be equipped with an IP-module.



Specifications

- The corresponding cable are included with delivery.
- Cascadable up to a port capacity of 256 ports by tree-chaining
- Computer selection by push buttons, Keyboard -Hotkeys and OSD-Menu
- On-Screen-Display und system notification as a Pop-Up
- Automatic Power ON/OFF pushing the console back to the rack
- Supports all USB suitable operating systems: for example DOS, Windows Series / Server 2008 / Server 2013, Linux, MacOS, etc.
- Numeric LED status indicators for clear display of port status


Properties

- 1U 17" LCD console, 571mm total depth
- Stepless, adjustable angle from 0 to 105° with high quality torque hinges
- Easy one-man-assembly with the included installation angles
- Integrated 16-port Combo VGA KVM-switch
- Adjustable depth: 560mm to 900mm (Standard)
- Chromed metal handle
- Practical knurled screws
- High graphic resolution, up to 1280 x 1024 with 60Hz

Keyboard versions:

Available in following versions: German (DE), US-English (US), UK-English (UK), French (FR), Spanish (SP), Italian (IT). Swiss / German (CH) and swedish / finnish (SWE/FI)

Versions available on request: Turkish (TK), Russian(RU)

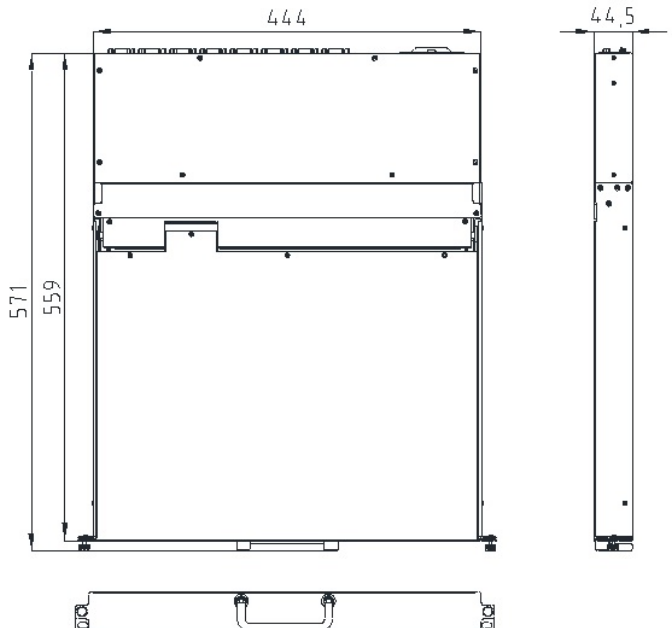

Technical data:

Connections KVM	Graphic	16 HDDB-15
	Console(remote)	1 x RJ-45 (only with IP version)
	Console (local)	2 x USB-A
	Power supply	1 x DC-12V
Connection cable (Standard)	2x PS/2 / USB / VGA Combo, 4in1 Combo cable	16x KD-KAB-102-4 (1.8m)
Additional supply	2x PS/2 / USB / VGA Combo, 4in1 Combo cable	KD-KAB-103-4 (3,0m) KD-KAB-105-4 (5,0m)
Switch	LCD settings	5 Pressure switch
	ON / OFF	1 Pressure switch
	OFF (LCD folded)	1 Semi-covert pressure switch
LED-Display panel	Operation	1 x green/red
	Number	1 x blue
	Capital letters	1 x blue
	Scroll	1 x blue
LED-Display KVM	Port/Switch	16 x green (Port)
Emulation	Keyboard/ Mouse	USB / PS/2
	Display	Yes
Port selection	Push Button / Hotkey / OSD	
Graphic	17" LCD	1280 x 1024
	Colors	16,2 Mio.
	Frame Rate	H: 31,0 KHz. – 81,0 KHz. V: 56,0 KHz. – 76,0 KHz.
	Viewing angle	H: 140° / V: 130°
	Bandwith	140 Mhz.
	Brightness	300 cd/m ²
	Contrast	700 : 1
	Reaktion time	4 ms.
	Pixel pitch	0,264mm (H) x 0,264mm (V)
	Backlight	LED
Input values	100 V. – 240 V. AC, 48 Hz – 62 Hz	
Output values	DC 12V., 4,16A	
Power consumption	230 V / 16,8 Watts	
Certification	RoHS, RoHS2, CE	
Environment	Operating temperature	-10 - 50°C
	Storage temperature	-20 – 60°C
	Humidity	0 – 80% relative humidity (non condensing)
Physical properties	Casing	High performance steel
	Color	RAL 9005
	Weight	18.1 kg incl. angles
	Dimension (L x W x H) w/o handle	555 x 450 x 44,5mm (19" / 1U)
	Dimension (L x W x H) w. handle	567 x 450 x 44,5mm (19" / 1U)
Packaging	Weight	19.1 kg
	Dimension (L x W x H)	74 x 62 x 18 cm