

Touchscreen
option


AW-1916K5 / AW-1932K5



- 19" LCD Monitor with LED Backlight
- 16 / 32 Port CAT.5 KVM
- Depth 640mm only



AW-1916 K5 / AW-1932 K5 is a 19" Monitor-Keyboard-Drawer with LED Backlight. A value keyboard with number block and touchpad and the integrated 16 /32 Port CAT.5KVM are completing the external design. The casing conforms the 1U Standard, is easily installed and mountable with the included mounting kit.

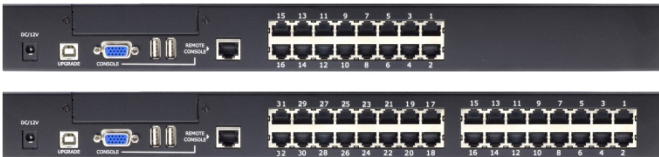

Specifications

- Tree-chainable for next level up to 16 KVM-switches
- Tree-chaining distance up to 5 meters
- Port capacity is scalable up to 256 PCs through tree-chaining with PMC models
- Computer selection by Keyboard -Hotkeys and OSD-Menu
- On-Screen-Display und system notification as a Pop-Up
- Additional console port (competing)
- With an additional (optional) receiver PMC-300R and by an 1:1 Cat.x cable connection the control panel can be reflected.
- Supports all USB suitable operating systems: for example DOS, Windows Series / Server 2008 / Server 2013, Linux, MacOS, etc.
- Numeric LED-Status displays for a clear display of the port status
- Buzzer sound confirms the hotkey and port circuit (de-activated)
- AutoScan dwell time of 5 ~ 95 seconds for OSD programmable
- Password protection
- Auto-Logout, Timeout-Support
- Firmware / Software upgradeable

Properties

- 1U 19" LCD console, 640mm depth
- Stepless, adjustable angle from 0 to 105° over high quality unique torque hinges
- Easy one man assembly with the included installation angles.
- Adjustable depth from 600mm up to 1130mm tread depth
- 3 Front USB-connectors
- Integrated 16 /32 port CAT.5 KVM
- Chromed metal handle
- Practical knurled screws
- High graphic resolution, up to 1280 x 1024 with 60Hz DDC, DDC2 and DDC2B

Keyboard versions

Available in following versions: German (DE), US-English (US), UK-English (UK), French (FR), Spanish (SP), Italian (IT) and Swiss / German (CH)

Versions available on request: Turkish (TK) and Russian (RU)

Trackball version is possible, in combination with a [Cherry G84-4400](#) Trackball Keyboard.



Technical data:

Connections KVM	Graphic / Keyboard / Mouse	16 x 32 x RJ-45
	Console(remote)	1 x RJ-45 for PMC-300R
	Console (local)	1 x VGA/2 x USB-A
	Firmware	1 x USB-B
	Power supply	1 x DC-12V
	Remote	1 x RJ-45
Connection cable / Dongle (not included in the delivery)	VGA & 2 x PS2	Dongle-PS/2 V3
	VGA & 1 x USB	Dongle-USB V3
Switch	LCD settings	4 Pressure switch
	ON / OFF	1 Pressure switch
	OFF (LCD folded)	1 Semi-covert pressure switch
LED-Display panel	Operation	1 x green
	Number	1 x green
	Capital letters	1 x green
	Scroll	1 x green
LED-Display KVM	Port/Switch	16 /32 green (Port)
Emulation	Keyboard/ Mouse	USB & PS/2
Graphic	19" LCD	1280 x 1024
	Colors	16,2 Mio.
	Frame Rate	H: 31,0 KHz. – 82,0 KHz. V: 60,0 KHz. – 75,0 KHz.
	Viewing angle	H: 140° / V: 130°
	Bandwith	140 Mhz.
	Brightness	300 cd/m ²
	Contrast	700 : 1
	Reaktion time	4 ms.
	Pixel pitch	0,264mm (H) x 0,264mm (V)
	Backlight	LED
Input values	100 V. – 240 V. AC, 48 Hz – 62 Hz	
Output values	DC 12V., 4,16A	
Power consumption	230 V / 14,6 Watt	
Certification	RoHS, RoHS2, CE	
Environment	Operating temperature	0 – 40°C
	Storage temperature	-20 – 60°C
	Humidity	0 – 80% relative humidity (non condensing)
Physical properties	Casing	High performance steel
	Color	RAL 9005
	Weight	14,9 kg incl. angles
	Dimension (L x W x H) without handle	64,00 x 43,6 x 4,4cm (19" / 1U)
	Dimension (L x W x H) with handle	68,20x 43,6 x 4,4cm (19" / 1U)
Packaging	Weight	17,1 kg
	Dimension (L x W x H)	77,5 x 58 x 21 cm